

# UTILITY PATENT APPLICATION TRANSMITTAL

## (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
JEL 31209Total Pages in this Submission  
3**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

Susumu MATSUZOE and Takeshi NAKAYAMA

and invented by:

IMAGE INPUT APPARATUS

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 53 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
**JEL 31209**

Total Pages in this Submission  
**3**

**Application Elements (Continued)**

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal                      Number of Sheets 20
- b. ☐ Informal                      Number of Sheets \_\_\_\_\_
4. ☒ Oath or Declaration
- a. ☒ Newly executed *(original or copy)*                      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied  
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449                      ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class    ☐ Express Mail *(Specify Label No.):* \_\_\_\_\_

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
**JEL 31209**

Total Pages in this Submission  
**3**

**Accompanying Application Parts (Continued)**

15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

| For  | #Filed | #Allowed | #Extra | Rate      | Fee        |
|--|--------|----------|--------|-----------|------------|
| Total Claims   | 11     | - 20 =   | 0      | x \$18.00 | \$0.00     |
| Indep. Claims  | 7      | - 3 =    | 4      | x \$78.00 | \$312.00   |
| Multiple Dependent Claims (check if applicable) <input type="checkbox"/> |        |          |        |           | \$0.00     |
| <b>BASIC FEE</b>   |        |          |        |           | \$690.00   |
| <b>OTHER FEE (specify purpose)</b>                                       |        |          |        |           | \$0.00     |
| <b>TOTAL FILING FEE</b>  |        |          |        |           | \$1,002.00 |

- ☒ A check in the amount of **\$1,002.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **19-4375** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature

James E. Ledbetter, Reg. No. 28,732  
Stevens, Davis, Miller & Mosher, LLP  
1615 L Street N.W., Suite 850  
P.O. Box 34387  
Washington, D.C. 20043-4387  
Telephone: 202/408-5100  
Facsimile: 202/408-5200

Dated: **July 6, 2000**

cc:

- 1 -

# IMAGE INPUT APPARATUS

## BACKGROUND OF THE INVENTION

The present invention relates to an image input apparatus connected to another apparatus via a bus, and particularly to an image input apparatus which  
5 reads a manuscript image to transfer it to another apparatus.

The image input apparatus such as an image scanner is connected via a bus to other apparatus such as a higher-level apparatus of a computer, and reads a  
10 manuscript image such as a picture, a photograph and a document to transfer the read image data to the other apparatus. The transfer of the image data is performed by use of a parallel interface such as Centronics-conformable interface and SCSI (Small Computer System  
15 Interface) or a serial interface such as RS-232C and RS-422.

In the communication systems using these interfaces, the asynchronous communication is performed. When the communication is performed with  
20 another peripheral equipment connected to these interfaces, the image scanner makes the mediation for securing the right to use the bus each time it transmits or receives data. After acquiring the right to use, an output of a command and like and a response  
25 of a computer thereto are performed.

09509597.070600

Fig. 11 is a timing chart of an image transfer in an image scanner using a conventional communication system.

First, the computer transfers to the image scanner the setting data for the reading conditions such as the size of the manuscript image and the reading resolution. The image scanner sends OK to the computer after receiving the setting data and finishing the setting of the units. Upon receiving it, the computer outputs a reading-start command to the image scanner. When receiving this reading-start command, the image scanner sends OK to the computer and starts to read the image.

The image scanner reads each line of the manuscript image by use of a reading unit, and stores it in a memory one by one. At this time, in the case of the image scanner using an automatic draft feeder (ADF), it is very difficult to halfway stop the sheet which is being automatically fed. Also, in the case of a flat head (FB) type image scanner, halfway stopping the reading operation will cause a shift in that part of the sheet, so that the read image has stripes. Therefore, once the manuscript image starts to be read, the reading operation cannot be stopped until one sheet of manuscript image is finished to read.

The computer requests the image scanner to transfer the read image data. The image scanner responds to this request to transfer the image data,

09609697-070600

which is stored in the memory, to the computer via the interface. When the image data is transferred to the computer, it is necessary to secure the right to use the bus each time the computer sends to the transfer request, and thus the image data cannot be transferred with a constant period.

Therefore, when the image scanner cannot secure the right to use the bus for the image data transfer, it takes time for the image data to be completely transferred. As a result, the image scanner needs a memory having a capacity capable of at least storing image data of one-sheet image. Thus, it is a neck to provide this memory when we consider reducing the cost of the image scanner (the first problem).

In addition, when the sheets of manuscript image are automatically fed by the ADF, command data indicating the end of reading each manuscript sheet is transferred to the computer each time one sheet of manuscript image is read out. Then, the image data is again transferred in response to the transfer request from the computer. At this time, since time is necessary to secure the right to use the bus if the bus is busy, the next sheet of manuscript image cannot be started to read.

When a plurality of sheets of manuscript are continuously fed and read, it is necessary to shorten the intervals at which the sheets are read, in order to speed up the processing. If one of the sheets cannot

09609697.070600

5 a time. However, the larger the number of sheets is  
read, the larger the memory capacity becomes (the  
second problem).

10 is taken for the image data to be completely transferred. Moreover, error checking is performed when the transferred image data is transmitted and received. If error is caused, the image data is again transferred. In other words, since the reading process  
15 is not intermitted even when the image data is again transmitted, the read image data is accumulated on the image scanner side.

20 of storing the image data corresponding to at least one sheet of manuscript. Therefore, it is again a neck to provide this memory when we consider reducing the cost of the image scanner (the third problem).

## 25 SUMMARY OF THE INVENTION

It is an object of the present invention to provide an image input apparatus capable of transferring data from a memory of which a capacity is

as small as possible, thereby solving the first problem.

It is another object of the present invention to provide an image input apparatus capable of  
5 periodically transferring image data corresponding to a plurality of sheets of manuscript using a memory of which a capacity is as small as possible, thereby solving the second problem.

It is still another object of the invention  
10 to provide an image input apparatus capable of a data transfer using a memory of which a capacity is as small as possible, thereby solving the third problem.

A first image input apparatus according to the present invention comprises communication means for  
15 performing a transfer of image data, which is read out by reading means, to another apparatus and a transfer of control data to the other apparatus. Here, the communication means has a first mode in which a periodic data transfer can be assured, and a second  
20 mode in which the periodic data transfer cannot be assured. The communication means transfers the image data in the first mode, and transfers the control data in the second mode.

Therefore, since the image data is  
25 transferred in the first mode in which the periodic transfer can be assured, the image data read out by the reading means can be periodically transferred to the other apparatus, so that the image data does not stay

09609697.070600



5 transfer cannot be assured to the other apparatus which  
does not need the periodic data transfer, the transfer  
band in the first mode can be effectively used.

10 manuscript image as supplied are sequentially read and  
image data of each of the plurality of sheets of the  
manuscript image as read is transferred to another  
apparatus, the image data of one sheet is transferred  
in a transfer mode in which a periodic data transfer  
15 can be assured, and then status data indicating the  
state of the image input apparatus is transferred in  
the transfer mode.

25 Consequently, it is possible to increase the image  
input processing speed. Also, since the image data  
does not stay in the image input apparatus, the  
capacity of the memory for storing the image data can

be made as small as possible.

A third image input apparatus according to the present invention transfers image data, which is read by reading means, in a transfer mode in which a  
5 periodic data transfer can be assured, and again transfers the same data as the transferred image data in a free period of the transfer mode.

Therefore, since the image data is transferred in the transfer mode in which the periodic  
10 data transfer can be assured, the image data read by the reading means can be periodically transferred to another apparatus. In addition, since the same image data as the transferred image data is again transferred in the free period (in which there is no image data to  
15 be transferred) of the transfer mode, the re-transferred image data can be used when error occurs in the first transmission and reception of the image data. In other words, the image data can be periodically transferred to the other apparatus irrespective of  
20 whether or not error occurs in the transmission and reception of the image data. Consequently, the image data does not stay in the image input apparatus, so that the capacity of the memory for storing the image data can be made as small as possible.

25 An image input apparatus according to the first aspect of the present invention comprises: reading means for reading a manuscript image; and communication means for performing a transfer of image

09609697.070600

5 and a second mode in which the period data transfer cannot be assured, and transfers the image data and the control data in the first and second modes, respectively.

10 the first mode in which the periodic transfer can be  
assured, the image data read by the reading means is  
periodically transferred to the other apparatus. As a  
result, the image data does not stay in the image input  
apparatus, so that the capacity of the memory for  
15 storing the image data can be made as small as  
possible. Moreover, since the control data is  
transferred in the second mode in which the periodic  
transfer cannot be assured to the other apparatus which  
does not need the periodic transfer, the transfer band  
20 in the first mode can be effectively used.

25 data read by the reading means to another apparatus,  
wherein the communication means has a mode in which a  
periodic data transfer can be assured, and transfers  
the image data in the mode and transfers data other

than the image data in a period in which there is no image data to be transferred.

Therefore, the information about the image input apparatus can be transmitted to the other apparatus by making effective use of the period in which the transfer of the image data is not performed.

An image input apparatus according to the third aspect of the present invention comprises: reading means for reading a manuscript image; and communication means for transferring image data read by the reading means to another apparatus, wherein the communication means has a mode in which a periodic data transfer can be assured, and when the image data is transferred in the mode, the communication means transfers data other than the image data until the transfer of the image data is started.

Therefore, the state of the image input apparatus can be transferred to the other apparatus by making effective use of the period in which the image data is not transferred, until the transfer of the image data is started. Also, since the image data is periodically transferred immediately after the manuscript sheet starts to be read, the image data can be started to transfer without delay. As a result, the data transfer can be made using a smallest-capacity memory.

An image input apparatus according to the fourth aspect of the present invention comprises:

supply means for successively feeding a plurality of manuscript sheets; reading means for sequentially reading the plurality of manuscript sheets fed by the supply means; and communication means for transferring  
5 image data of each of the plurality of manuscript sheets, which is read by the reading means, to another apparatus, wherein the communication means has a transfer mode in which a periodic data transfer can be assured, and transfers status data, which indicates a  
10 state of the image input apparatus, in the transfer mode after transferring one-sheet image data in the transfer mode.

Therefore, after the read image data is periodically transferred, the status data can be surely  
15 transferred without delay. The other apparatus can know that the image data of one sheet has been completely transferred from the transmission of this status data. The next process can be successively performed on the basis of this status data. That is,  
20 since the image data and status data are transferred in the transfer mode in which the periodic data transfer can be assured, the right to use the bus can be immediately acquired by the time in which the image data of the next sheet starts to be processed. As a  
25 result, the image data of the plurality of sheets can be periodically transferred, so that the image input processing speed can be increased. Also, since the image data does not stay in the image input apparatus,

00509697-070600

the capacity of the memory for storing the image data can be made as small as possible.

09609697.070600

An image input apparatus according to the fifth aspect of the present invention comprises: supply means for successively feeding a plurality of manuscript sheets; reading means for sequentially reading the plurality of manuscript sheets fed by the supply means; and communication means for transferring image data of each of the plurality of manuscript sheets, which is read by the reading means, to another apparatus, wherein the communication means has a transfer mode in which a periodic data transfer can be assured, transfers the image data of the plurality of manuscript sheets in the transfer mode, and transfers status data, which indicates a state of the image input apparatus, in the transfer mode in an interval between the image data of the plurality of manuscript sheets to be transferred.

Therefore, the status data can be surely transferred without delay by squeezing into the image data of the plurality of manuscript sheets to be transferred. The other apparatus can know the interval between the image data of one sheet and the image data of the next sheet from the transmission of the status data, so that the image data of the next sheet can be successively transferred on the basis of the status data. In other words, since the image data and status data are successively transferred in the transfer mode

5

10

15

25

transfers the same image data as the transferred image data in a free period of the transfer mode.

Therefore, since the image data is transferred in the transfer mode in which the periodic transfer can be assured, the image data read by the reading means is periodically transferred to the other apparatus. Moreover, since the same image data as the image data transferred in the transfer mode is again transferred in the free period of the transfer mode, the re-transmitted image data can be used for the case in which error occurs when the image data is first transmitted and received. That is, the image data can be transferred to the other apparatus irrespective of whether or not error occurs when the image data is transmitted and received.

An image input apparatus according to the eighth aspect of the present invention comprises: reading means for reading a manuscript sheet; and communication means for transferring image data, which is read by the reading means, to another apparatus, wherein the communication means has a transfer mode in which a periodic data transfer can be assured, transfers the image data in the transfer mode, and successively transfers the same image data as the transferred image data in the transfer mode.

Therefore, since the image data is transferred in the transfer mode in which the periodic transfer can be assured, the image data read by the

09609697.070600



reading means is periodically transferred to the other apparatus. Also, the image data to be transferred can be accurately and successively transferred twice or more, and thus the successively transferred image data  
5 can be immediately used for the case in which error occurs when the image data is transmitted and received. In other words, even the other apparatus to which the image data is transferred can decrease the time necessary for the image data to be processed.

10 An image input apparatus according to the ninth aspect of the present invention is the image input apparatus according to the seventh or eighth aspect of the present invention, wherein the image data to be transferred is divided into predetermined units.

15 Therefore, when the predetermined unit is the reading of one line of the sheet by the reading means, for example, the image data can be periodically transferred every line, so that the capacity of the memory can be set to the capacity corresponding to the  
20 predetermined unit.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a hardware structure of an image input apparatus of a first  
25 embodiment of the present invention;

Figs. 2A and 2B are diagrams showing a time-based transition state of a transfer using an IEEE standard 1394 interface, where Fig. 2A is a diagram

09609697.070600

showing the detail of an isochronous region, and Fig. 2B is a diagram showing the detail of an asynchronous region;

Fig. 3 is a timing chart of an image transfer  
5 in the image input apparatus shown in Fig. 1;

Fig. 4 is a schematic perspective view of an actual image scanner according to the first embodiment of the present invention;

Fig. 5 is a schematic perspective view of the  
10 image scanner shown in Fig. 4, with its draft cover and automatic draft feeder opened;

Fig. 6 is a schematic longitudinally cross-sectional view of a main part, showing the arrangement of the automatic draft feeder and scanning module;

Fig. 7A is a schematic diagram showing the  
15 stop position of the scanning module in an automatic feeding mode;

Fig. 7B is a schematic diagram showing the setting of the manuscript position of the scanning  
20 module in a manual feeding mode;

Fig. 8 is a flowchart showing a reading process in the automatic feeding mode;

Fig. 9 is a flowchart showing a process in an I/F portion;

Fig. 10 is a flowchart showing a reading  
25 process in an FB;

Fig. 11 is a timing chart of an image transfer in an image scanner using a conventional

00902076990

communication system;

Fig. 12 is a timing chart of an image transfer in an image input apparatus according to a second embodiment of the present invention;

5 Fig. 13 is a schematic diagram of a main part of an actual image scanner according to the second embodiment of the present invention;

Fig. 14 is a flowchart showing a reading process in the image scanner shown in Fig. 13;

10 Fig. 15 is a flowchart showing a process in an I/F portion of the image input apparatus according to the second embodiment of the present invention;

Fig. 16 is a timing chart of an image transfer in an image input apparatus according to a  
15 third embodiment of the present invention;

Fig. 17A shows an isochronous transfer format;

Fig. 17B shows isochronous data;

Fig. 18 is a flowchart of a reading process  
20 in an ADF;

Fig. 19 is a flowchart of a process in an I/F portion; and

Fig. 20 is a flowchart of a reading process in an FB.

25

#### DETAILED DESCRIPTION OF THE EMBODIMENTS

Embodiments of the present invention will be described with reference to Figs. 1-10 and 12-20.

09609697.070600

(First Embodiment)

Fig. 1 is a diagram showing a hardware structure of an image input apparatus according to a first embodiment of the present invention.

5 As shown in Fig. 1, an image scanner 1 as the image input apparatus according to the first embodiment is connected via a bus to a computer 10 as another apparatus. The IEEE standard 1394 (IEEE: Institute of Electrical and Electronic Engineers, Inc.) interface  
10 for fast serial transmission is used as communication means for performing a data communication between the image scanner 1 and the computer 10.

The image scanner 1 includes a CPU 2 as control means for controlling the whole image scanner  
15 1; a carrier 3 for feeding, carrying and discharging sheets of manuscript image; a reader 4 as reading means for reading images on the sheets of manuscript and converting them into image data; an image processor 5 for converting the analog image data from the reader 4  
20 into digital image data, and processing to convert the digital image data to binary data; a memory 6 as storage means for storing the processed image data; and an I/F portion 7 as communication means for controlling the communication according to the IEEE standard 1394.  
25 The constitutional blocks 1-7 are interconnected by a bus 8. The image scanner 1 and the computer 10 are connected together through a cable 9 of the IEEE standard 1394 interface.

009020.2696960

009020" 2696960

In the IEEE standard 1394 interface, it is possible to perform the isochronous transfer (synchronous transfer) which can assure a periodical data transfer, and the asynchronous transfer which cannot assure the periodical data transfer. The isochronous transfer mode can assure the transfer with a constant speed but with delay not allowed (i.e., the transfer at a constant band within periodically continuous time), but does not perform any re-transmission due to error. Therefore, the isochronous transfer assures the transfer band and transfer time of data, but does not assure communication error. On the contrary, the asynchronous transfer performs the transfer using a band width which is not used in the isochronous transfer, and performs the re-transmission when communication error occurs so as to assure the correct data transfer.

Figs. 2A and 2B show a time-based transition state of a transfer according to the IEEE standard 1394 interface. Fig. 2A is a diagram showing an isochronous region in detail, and Fig. 2B is a diagram showing an asynchronous region in detail.

As shown in Fig. 2A, in the isochronous transfer, data called a cycle start packet is generated for an isochronous cycle (125- $\mu$ s period) in principle from any one of a plurality of nodes connected via a bus. The node wishing for the isochronous transfer transmits an isochronous request signal to an

isochronous manager to secure the right to perform the isochronous transfer. Each node is assigned with a channel number (channels 1-5). The node acquired the right can assure the data transfer every isochronous  
5 cycle. In other words, in the isochronous transfer, the periodic data transfer can be surely made within the isochronous cycle. In this embodiment, this isochronous transfer mode is used to transfer the image data from the I/F portion 7 of the image scanner 1 to  
10 the computer 10.

As illustrated in Fig. 2B, in the asynchronous mode, the regions other than the isochronous regions are used as the asynchronous regions. In one equality interval, one node can  
15 transmit only once. When a node wishing for the transmission finishes the transmission, a mediation reset gap is generated. When the mediation reset gap is detected, the next equality interval comes, and again one node can transmit only once. The isochronous  
20 transfer allows a transmitter side to transmit data to a receiver side in one direction, while the asynchronous transfer allows the receiver received the data to transmit that effect back to the transmitter side. Therefore, although the data transfer with  
25 constant period cannot be assured, the re-transmission can be made when error is caused in the transfer, and thus the correct data transfer can be assured. In this embodiment, this asynchronous transfer mode is used for

09609697.070600

command data (control data), such as setting data and instruction data which do not need any periodic transfer and are transmitted and received between the I/F portion 7 and the computer 10. Thus, the

15 isochronous transfer which has a limited transfer bandwidth can be utilized more effectively.

Fig. 3 is a timing chart of the image transfer in the image input apparatus shown in Fig. 1.

First, the setting data for the reading

10 conditions is transferred from the computer 10 to the image scanner 1 in the asynchronous transfer mode. When the image scanner 1 receives this setting data and finishes setting the conditions of the units, it sends OK to the computer 10 in the asynchronous transfer

15 mode. When the computer 10 receives this reply, it transmits a reading-start command to the image scanner 1 in the synchronous transfer mode. When the image scanner 1 receives this reading-start command, it sends OK to the computer 10 in the asynchronous transfer

20 mode. Thus, the image scanner 1 secures the right to perform the isochronous transfer for the image data. In this embodiment, the I/F portion 7 functions as the mediation means for acquiring the right to perform the isochronous transfer.

25 As described above, the isochronous manager assigns the isochronous channel to the apparatus which transfers data in the isochronous transfer mode. In this embodiment, the computer 10 as the isochronous

009020269396

manager responds to the request from the I/F portion 7 to assign the isochronous channel to the image scanner 1, so that the image scanner 1 can acquire the right to perform the isochronous transfer.

5           After securing the right to perform the isochronous transfer, the image scanner 1 starts the reading of the manuscript images. The reason for this is that since the once started image reading process cannot be interrupted, the image reading process cannot  
10 be started until the image scanner acquires the right to perform the isochronous transfer. In addition, the I/F portion 7 transfers dummy data other than the image data to be transferred, to the computer 10 until the image data transfer is started after finishing the  
15 prepare of the manuscript-image reading. The computer 10 knows that no trouble such as the stop of operation occurs in the image scanner 1, by confirming that this dummy data has periodically transferred.

          The image scanner 1 reads by the reader 4  
20 each line of the manuscript image of the manuscript sheet carried by the carrier 3 or placed on a glass 11b which will be described later, converts the read image into a binary signal by the image processor 5, and stores the binary image in the memory 6. The memory 6  
25 has a capacity capable of storing data for at least one line of the manuscript image. When the image data for one line has been written in the memory 6, the I/F portion 7 reads the image data for one line from the

00603597.070500



memory 6, and transfers it to the computer 10 in the isochronous transfer mode.

If it is now assumed that the resolution of the reader 4 is 300 dpi and that the maximum manuscript sheet size is A3, the amount of one-line data after the binary conversion is 440 bytes. Of course, if the read image data is not converted into the binary signal but produced in a form of a multilevel signal, the memory requires a larger capacity. Therefore, under this condition, the memory 6 needs the capacity of at least 440 bytes. Moreover, if the amount of data (packet) which is transferred once in the isochronous transfer mode is set as 440 bytes or more, the image data for one line can be transferred in one cycle.

The reading process for each line by the reader 4 is continuously performed with a constant reading-period. Since the image data transfer from the I/F portion 7 to the computer 10 is performed faster than the reading of the manuscript image by the reader 4, and since the periodic data transfer in the isochronous transfer mode cannot be assured, the memory 6 may have the capacity of at least one line. In addition, if there is no image data to be transferred until the next line is read after reading a certain line, the period in which no image data is transferred is effectively utilized so that a vacant packet as dummy data can be transferred to the computer 10 in that period. By this periodic transfer of the dummy

00609697-070600

09609697.070600

data, the computer 10 can grasp that the image scanner 1 is not causing any trouble such as the stop of operation. Of course, the status information of the image scanner 1 (the presence or absence of the manuscript image sheet and the occurrence of jam) can be transferred in place of such dummy data. Thus, the more detailed situations in which the image scanner 1 is placed can be grasped without separately providing the process for transmitting and receiving the status information.

The image input apparatus according to the first embodiment of the present invention will be described in more detail with reference to an example of an actual image scanner.

Fig. 4 is a schematic perspective view of an actual image scanner according to the first embodiment of the present invention. Fig. 5 is a schematic perspective view of the image scanner shown in Fig. 4 with a manuscript cover and automatic draft feeder opened. Fig. 6 is a schematic longitudinal cross-sectional view of a main part showing the arrangement of the automatic sheet feeder and scanning module. Fig. 7A is a schematic diagram showing the stop position of the scanning module in the automatic feeding mode. Fig. 7B is a schematic diagram showing the manuscript position of the scanning module in the manual feeding mode.

As shown in Figs. 4 and 5, the image scanner

1 includes: a main body 11 in which an optical scanning module (which will be describe later) is incorporated; a manuscript cover 12 mounted on the top of the body 11 so that it can be opened or closed; and an automatic draft feeder (ADF) 13 for stacking sheets of manuscript image thereon and automatically supplying them one by one. The main body 11 includes an operation panel 11a provided on the front, and the CPU 2 (see Fig. 1) incorporated to control all the operating of the apparatus. On the top of the main body 11, there is provided a transparent glass plate 11b as a holder on which a sheet of manuscript image to be read is placed. On the inside of the main body 11, there is provided a transparent slit-shaped glass window 11c. The transparent glass 11b is provided to occupy all region of the top except the inner side (opposite to the operation panel 11a) of the main body 11. The root ends of the manuscript cover 12 and ADF 13 are mounted on the inner side of the main body 11 so that they can be opened and closed. The manuscript cover 12 and ADF 13 can be opened together as a unitary body as shown in Fig. 5. Thus, when the manuscript cover 12 is opened, a sheet of manuscript image can be placed by hand on the transparent glass 11b. On the top of the manuscript cover 12, there is provided a collection tray 12a which receives the read sheet sent from the ADF 13.

The ADF 13 includes a housing 13a, and a

09609697.070600

09609697.070600

hopper unit 14 provided on the upper end of the housing 13a. The hopper unit 14 includes a feed hopper 14a for stacking sheets P of manuscript image thereon as shown in Fig. 4. The hopper unit 14 also includes a feed roller 14b provided above the sheet send-out end (the left end in Fig. 6) of the feed hopper 14a in order to pick up the sheet P and send out it as shown in Fig. 5. The housing 13a includes a pair of a separation roller 13b and retard roller 13c provided downstream just after the feed roller 14b, in order to prevent stuck sheets from being sent out. Moreover, a carrying path is provided to extend from around the top of the main body 11 to the inside, turning back to the collection tray 12a of the manuscript cover 12. A plurality of carrying rollers 13d are provided along this carrying path. The ADF 13 and the hopper unit 14 constitute the carrier 3 shown in Fig. 1.

On the inside of the main body 11, there is provided a scanning module 15 for reading the images on the sheets as shown in Fig. 6. The scanning module 15 has provided therein a reduced optical image reading system using a CCD, and moves along a guide 15a provided to extend from around the operation panel 11a on the front of the main body 11 to around the back of the main body 11. This scanning module 15 constitutes the reader 4 shown in Fig. 1.

In the automatic feeding mode in which the ADF 13 is operated, the scanning module 15 rests at the

left end of the main body 11 as shown in Fig. 7A. In this automatic feeding mode, the scanning module 15 reads the image on the sheet P at the reading position 15b (see Fig. 6) when the sheet P supplied from the feed hopper 14a passes along the carrying path. A manuscript sensor (not shown) for detecting the fore end of the manuscript sheet is provided just before the reading position 15b.

When the scanning module 15 reads the image on the sheet placed on the transparent glass 11b, it is moved to around the extreme forward end, as shown in Fig. 7B, of the transparent glass 11b from the position shown in Fig. 7A. Then, the scanning module 15 moves from the position shown in Fig. 7B as the origin to the left side in order to scan the sheet, thereby reading the image.

The reading operation in this image scanner will be described for the case using the ADF 13 (for ADF) and for the case using the transparent glass 11b (for FB) with reference to the flowcharts of Figs. 8-10. Fig. 8 is a flowchart showing the ADF reading process, Fig. 9 is a flowchart showing the process in the I/F portion 7, and Fig. 10 is a flowchart showing the FB reading process.

In the reading process for ADF, as shown in Fig. 8, the setting data for the reading conditions is first transferred from the computer 10 to the image scanner 1 in the asynchronous transfer mode (S101).

The CPU 2 uses this transferred setting data to initialize the image scanner 1 (S102). At this time, the CPU 2 also confirms whether or not there is a sheet of manuscript image on the feed hopper 14a.

5           Then, the CPU 2 waits for the computer 10 to send the reading-start command (S103). When the reading-start command is transferred from the computer 10 to the CPU 2 in the asynchronous transfer mode and received by the CPU 2, the light source of the reader 4  
10 is turned on (S104). The CPU 2 issues to the I/F portion 7 a command to acquire the right to perform the isochronous transfer of image data (S105). The CPU 2 waits for the right to be acquired (S106), and then orders the carrier 3 to start carrying a manuscript  
15 sheet (S107).

          The CPU 2 waits for the manuscript sheet to be carried from the hopper unit 14 and arrive at the manuscript sensor just before the reading position 15b (S108). The CPU 2, when the fore end of the manuscript  
20 sheet is detected by the manuscript sensor, counts a constant time by a timer and causes the manuscript sheet to be further carried until the fore end of the manuscript sheet reaches the reading position 15b (S109). Then, the reader 4 reads one line of image on  
25 the manuscript sheet, and supplies it through the image processor 5 to the memory 6 where it is stored (S110). After one line has been read, followed by counting a certain time (S112), the next line is read (S110). The

009020.269999

processes from step S110 to step S112 are repeated to read all the images on the manuscript sheet (S111).

At this time, the I/F portion 7 performs the process shown in Fig. 9.

5           When receiving from the CPU 2 (S121) a command which orders the I/F portion 7 to acquire the right to perform the isochronous transfer, the I/F portion 7 sends the isochronous request to the computer 10 (S122), and waits until the channel is assigned and  
10 the right to perform the isochronous transfer can be acquired (S123). The I/F portion 7, when this right has been acquired, checks if the read one-line image data is stored in the memory 6 (S124). If there is no image data in the memory 6, the I/F portion 7 transmits  
15 dummy data to the computer 10 in the isochronous transfer mode (S125). If there is image data in the memory 6, the I/F portion 7 transfers the image data in the isochronous transfer mode (S126), and the operations in steps S124-S126 are repeated until all  
20 the images on one manuscript sheet has been completely transferred (S127).

Therefore, in the ADF reading process, although the time when any one of manuscript sheets starts to be read is uncertain, the image data, just  
25 after being started to read, can be surely periodically transferred to the computer 10, or transferred to the computer 10 without delay. In the ADF reading process, it is very difficult to interrupt the automatic feeding

009020.269996

of the manuscript sheets one by one. However, the image scanner 1 according to this embodiment can transfer the image data to the computer 10 using the small-capacity memory of one line without interrupting the supply of manuscript sheets.

In the FB reading process, as shown in Fig. 10, the setting data for the reading conditions is first transferred from the computer 10 to the image scanner 1 in the asynchronous transfer mode (S131). The CPU 2 uses this transferred setting data to initialize the image scanner 1 (S132).

Then, the CPU 2 waits for the computer 10 to issue the reading-start command (S133). If the CPU 2 receives the reading-start command transferred from the computer 10 in the asynchronous transfer mode, the CPU 2 orders the scanning module 15 to move to the position shown in Fig. 7B, and then causes the light source of the reader 4 to turn on (S134). The CPU 2 issues to the I/F portion 7 a command to secure the right to perform the isochronous transfer of image data (S136). The CPU 2 waits for the I/F portion 7 to acquire the right to perform the isochronous transfer (S136), and then orders the scanning module 15 to move in the sub-scanning direction (S137).

Thereafter, the scanning module 15 reads one line of the image on the manuscript sheet, and supplies it through the image processor 5 to the memory 6 where it is stored (S138). After the one-line image is read,



09609697.070600

a predetermined time is counted by a timer (S140), and then the image of the next line is read (S138). The operations in steps S138-S140 are repeated, reading all the images on the manuscript sheet (S139). In the FB  
5 reading process, a positional shift occurs when the scanning module 15 is halfway stopped from being moved. However, the image scanner 1 of this embodiment can transfer the image data using the small-capacity memory of one line to the computer 10 without interrupting the  
10 movement of the scanning module 15.

In the image input apparatus according to this embodiment, the dummy data may be empty data, the status information of the image scanner 1 or one-line image data transferred immediately before. Thus, by  
15 re-transmitting the just preceding image data, it is possible to check if the transferred data has error.

The IEEE standard 1394 interface in the image input apparatus according to this embodiment can be replaced by other interface such as USB having a  
20 transfer mode equivalent to the above mentioned isochronous transfer mode and asynchronous transfer mode.

(Second Embodiment)

25 The hardware structure of an image input apparatus according to a second embodiment of the present invention is the same as that of the image input apparatus according to the first embodiment shown

in Fig. 1 except that the carrier 3 functions as supply means for successively supplying, carrying and discharging a plurality of manuscript sheets one by one. Therefore, the structure will not be described in  
5 detail.

The image transfer in the image input apparatus according to the second embodiment will be described with reference to Fig. 12.

First, the setting data for the reading  
10 conditions is transferred from the computer 10 to the image scanner 1 in the asynchronous transfer mode. The image scanner 1, when receiving this setting data and finishing the setting of the apparatus, sends OK to the computer 10 in the asynchronous transfer mode. At this  
15 time, the image scanner 1 detects the presence or absence of a manuscript sheet to be fed to the carrier 3, and transfers the detected result as the status data indicating the status of the image input apparatus to the computer 10 in the asynchronous transfer mode.

20 When confirming that there is a manuscript sheet from this status data, the computer 10 sends the reading-start command to the image scanner 1 in the asynchronous transfer mode. The image scanner 1, when receiving this reading-start command, sends OK to the  
25 computer 10 in the asynchronous transfer mode. Then, the image scanner 1 acquires the right to perform the isochronous transfer for the image data. In this embodiment, the I/F portion 7 functions as mediation

000009697.070600

means for securing the right to perform the isochronous transfer.

As described above, the isochronous manager assigns an isochronous channel to the apparatus which  
5 performs the data transfer in the isochronous transfer mode. In this embodiment, the computer 10 as the isochronous manager responds to the request from the I/F portion 7 to assign the isochronous channel to the image scanner 1, so that the image scanner 1 can  
10 acquire the right to perform the isochronous transfer. After acquiring the right to perform the isochronous transfer, the image scanner 1 starts reading the manuscript image. The reason for this is that since  
15 the once started image reading process cannot be halfway stopped, the image reading process cannot be started until the right to perform the isochronous transfer is acquired.

In the image scanner 1, the carrier 3 carries the first manuscript sheet, the reader 4 reads one line  
20 of the image on the sheet, the image processor 5 converts the read image into a binary value, and the memory 6 stores the binary image. The memory 6 has a capacity capable of storing at least one line of the image on the sheet. When the one-line image data is  
25 stored in the memory 6, the I/F portion 7 reads the one-line image data from the memory 6, and transfers it to the computer 10 in the isochronous transfer mode.

If it is now assumed that the resolution of

09609697.070600

the reader 4 is 300 dpi and that the maximum manuscript size is A3, the amount of the one-line data after conversion into the binary value is 440 bytes. Of course, if the read image data is not converted into the binary value but directly produced in a multilevel, a larger capacity is necessary. Therefore, under these conditions, the memory 6 needs the capacity of at least 440 bytes. Moreover, if the amount of data (1 packet) to be once transferred in the isochronous transfer mode is 440 bytes or more, the one-line image data can be transferred in one cycle.

The reading process in which the reader 4 reads each line is repeatedly and successively performed with a constant period until the first sheet of manuscript image has been completely read. Since the I/F portion 7 transfers the image data to the computer 10 faster than the reader 4 reads the manuscript image, and since the periodic data transfer is surely performed in the isochronous transfer mode, the memory 6 may have the capacity of at least one line.

After finishing the reading of the first manuscript sheet, the I/F portion 7 transfers the status data indicating the status of the image input apparatus, to the computer 10 in the isochronous transfer mode at the next isochronous cycle. The computer 10 knows from the received status data that the first manuscript sheet has been completely read.

The transferred status data contains the state in which the light source of the reader 4 is turned on or off, the presence or absence of any manuscript sheet in the carrier holds 3, the presence or absence of paper clogging, and other circuit conditions.

The computer 10 can perform the next process on the basis of these received status data. Particularly, from the status data indicating the presence or absence of the next manuscript sheet to be carried by the carrier 3 (here, since there is the second manuscript sheet, "the sheet is present"), the computer 10 can know that the image data of the next sheet is successively being transferred. In other words, from only this status data, the computer 10 can know both that the first sheet has been read, and that the next image data is being transferred or not. As a result, the successive image data can be effectively processed.

The second sheet is successively read by the reader 4, and then the same steps are repeated as in the process for the first sheet.

In this way, the status data is squeezed into the isochronous transfers of the image data of a plurality of sheets and transferred in the isochronous transfer mode, so that the image data and status data can be surely transferred without delay. The other apparatus can know from the transmission of this status data the interval between the image data of one sheet

0000207690990

and the image data of the next page. As a result, the image data of the next sheet can be successively transferred on the basis of this status data.

In other words, the image data and status data are successively transferred in the isochronous transfer mode in which the periodic data transfer can be assured. Thereby, the image data of a plurality of sheets can be periodically transferred without waiting for the right to use the bus to be acquired until the image data of the next manuscript sheet starts to be processed. Accordingly, it is possible to increase the image input processing speed. Further, the image data does not stay in the image input apparatus, so that it is possible to make the capacity of the memory for storing the image data as small as possible.

The actual image scanner 1 will be described in detail with reference to Fig. 13. Fig. 13 is a schematic diagram of a main part of the image scanner 1 according to the second embodiment.

Referring to Fig. 13, a feed roller 111a is provided above a hopper 111 holding the stacked sheets of manuscript "A", and a separation roller 112a and a retard roller 112b are provided downstream to oppose up and down relative to the carrying path. The hopper 111 is, as well known, elastically urged to rotate clockwise around its right end as a fulcrum by a spring (not shown) so that the top one of the stacked manuscript sheets "A" can be pushed by the hopper 111

009020.2696960

09609697.070600

against the sheet feeding roller 111a and thus can be sent out by the rotation of the sheet feeding roller 111a. The hopper 111 includes a sheet detection sensor 111b for detecting the presence or absence of any one of the manuscript sheets "A". Only when any one or ones of the sheets "A" are detected, the sheets can be supplied. The separation roller 112a and retard roller 112b may be the same as ones in the prior art. A torque limiter incorporated in the retard roller 112b can act to prevent the overlapped sheets "A" from being sent out from the hopper 111.

On the downstream side of the separation roller 112a and retard roller 112b, there are provided three pairs of drive rollers 113a and 113b each in series along the carrying path in order to carry the sheet "A" sent out from the hopper 111. On the downstream side of the pairs of drive rollers 113a and 113b, there are also provided three pairs of feed rollers 114a and 114b each along the discharge path which is curved up in an arc shape in the carrying direction. In addition, discharge rollers 115a and 115b are provided on the downstream end.

The carrier 3 shown in Fig. 1 is constituted by the hopper 111, the sheet feeding roller 111a, the separation roller 112a, the retard roller 112b, the drive rollers 113a, 113b, the feed rollers 114a, 114b, and the discharge rollers 115a, 115b.

A read sensor 113a for detecting the fore end

10

15

20

issue the reading-start command (S1104). The reading-



start command is transferred from the computer 10 to the CPU 2 in the asynchronous transfer mode. The CPU 2, when receiving this command, causes the light source of the reader 4 to be turned on (S1105). The CPU 2  
5 orders the I/F portion 7 to acquire the right to perform the isochronous transfer of image data (S1106). The CPU 2 waits until the right to perform the isochronous transfer is acquired (S1107), and then orders the carrier 3 to start carrying the sheet  
10 (S1108).

The CPU 2 waits until the sheet is carried from the hopper 111 and arrives at the read sensor 116 (S1109). After the fore end of the sheet is detected by the read sensor 116, a certain time is counted by a  
15 timer, and the sheet is further carried until the fore end of the sheet arrives at the reader 4 (S1110). Then, the CPU 2 causes the reader 4 to read one line of the image on the sheet, and supply it through the image processor 5 to the memory 6 where it is stored (S1111).  
20 The CPU 2, after letting one line be read, orders the timer to count a predetermined time (S1113) and the reader to read the next line (S1111). The operations in steps S1111-S1113 are repeated to completely read one sheet of manuscript image. The end of reading one  
25 manuscript sheet can be known by detecting the back end of the sheet by the read sensor 116 and counting a constant time by the timer (S1112).

After finishing the reading of one sheet, the

5

10

15

20

25

the isochronous transfer mode is maintained. If there is no sheet, the processing ends (S1128).

According to this image scanner 1, the image data can be surely and periodically transferred to the computer 10 immediately after the start of reading, or transferred to the computer 10 without delay. In addition, after the image data of one sheet of a plurality of sheets has been transferred in the isochronous transfer mode, the status data is transferred in the same isochronous transfer mode. That is, the status data is transferred in the isochronous transfer mode in such a manner that it is repeatedly inserted between the isochronous transfers of the image data of a plurality of sheets. Thus, the image data and status data can be surely transferred without delay.

In other words, after one-sheet image data has been transferred, the status data are continuously transferred in the isochronous transfer mode in which the periodic data transfer can be assured. Thereby, it is possible to transfer the status data by the time when the image data on the next sheet starts to be processed, without the need to wait until the right to use the bus for the transfer can be secured. The image data of a plurality of sheets can be periodically transferred without being interrupted at each of the successively fed sheets. Consequently, since the image input processing speed can be increased and no image

09609697.070600

data stays in the image input apparatus, the capacity of the memory for storing the image data can be minimized to be as small as possible.

Moreover, the IEEE standard 1394 interface in  
5 this embodiment can be replaced by another interface such as USB which has the transfer mode equivalent to the above-mentioned isochronous or asynchronous transfer mode.

10 (Third Embodiment)

The hardware structure of an image input apparatus according to a third embodiment of the present invention is the same as that of the image input apparatus according to the first embodiment shown  
15 in Fig. 1, and will not be described in detail.

The image transfer in the image input apparatus according to the third embodiment will be described with reference to Fig. 16.

First, the setting data for the reading  
20 conditions is transferred from the computer 10 to the image scanner 1 in the asynchronous transfer mode. When receiving this setting data and finishing to set the apparatus, the image scanner 1 sends OK to the computer 10 in the asynchronous transfer mode. The  
25 computer 10 receives this reply, and issues the reading-start command to the image scanner 1 in the asynchronous transfer mode. The image scanner 1, when receiving the reading-start command, sends OK to the

computer 10 in the asynchronous transfer mode. Then,  
the image scanner 1 acquires the right to perform the  
isochronous transfer in order to transfer the image  
data. In this embodiment, the I/F portion 7 functions  
5 as mediation means for securing the right to perform  
the isochronous transfer.

As described above, the isochronous manager  
assigns an isochronous channel to the apparatus for  
performing the data transfer in the isochronous  
10 transfer mode. In this embodiment, the computer 10 as  
the isochronous manager responds to the request from  
the I/F portion 7 to assign the isochronous channel to  
the image scanner 1, and thus the image scanner 1  
acquires the right to perform the isochronous transfer.

15 When acquiring the right to perform the  
isochronous transfer, the image scanner 1 starts  
reading an image of a manuscript sheet. The reason for  
this is that since the once started image reading  
process cannot be interrupted, the image scanner 1  
20 cannot start the image reading process until the right  
to perform the isochronous transfer is acquired.  
Moreover, the I/F portion 7 transfers dummy data other  
than the image data to be transferred, to the computer  
10 in the period from when the manuscript image is  
25 ready to be read to when the image data starts to be  
transferred. The computer 10 can know by confirming  
the periodic transfer of the dummy data that no trouble  
such as the stop of operation occurs in the image

09609697-070600

scanner 1.

The image scanner 1 orders the reader 4 to read one line, as a unit, of the image on the manuscript sheet carried by the carrier 3 or the manuscript sheet placed on the transparent glass 11b, the image processor 5 to convert the read image into a binary value, and the memory 6 to store the binary image. The memory 6 has a capacity capable of storing data of at least one line (certain unit) of the manuscript image. When image data of one line is written in the memory 6, the I/F portion 7 reads the one-line image data from the memory 6, and transfers it to the computer 10 in the isochronous transfer mode. Subsequently, the I/F portion 7 reads the same image data as this transferred one-line image data from the memory 6, and again transfers it to the computer 10 in the isochronous transfer mode.

If it is now assumed that the resolution of the reader 4 is 300 dpi and the maximum manuscript sheet size is A3, the amount of binary one-line data is 440 bytes. Of course, if the read image data is not converted into the binary value but directly supplied in a multilevel, a larger capacity is necessary. Therefore, under these conditions, the memory 6 needs a capacity of at least 440 bytes. Moreover, if the amount of data (1 packet) to be transferred once in the isochronous transfer mode is 440 bytes or more, the one-line image data can be transferred in one cycle.

009020.2696960

The reading process for each line by the reader 4 is continuously performed with a constant period. The image data transfer from the I/F portion 7 to the computer 10 is made faster than the reader 4 reads the manuscript image, and the periodic data transfer in the isochronous mode can be assured. Thereby, the memory 6 may have a capacity of at least one line. The I/F portion 7 re-transmits the image data, but the re-transmitted image data is the same as that first transferred in the isochronous transfer mode. Since the image data even including this re-transmitted image data can be much faster transferred than the reader 4 reads, the minimum capacity of the memory 6 is not necessary to change.

15        Although in this embodiment the image data first transferred in the isochronous transfer mode is successively re-transmitted in the next isochronous cycle, the present invention is not limited to this. As described above, the image data is transferred much faster than the reader 4 reads, so that many isochronous cycles come between the reading of a certain line and the reading of the next line. When there is no image data to be transferred in one of these isochronous cycles, the same image data can be re-transmitted in this free period.

In addition, when there is such a free period, dummy data as a free packet is transferred to the computer 10 in this free cycle. If the dummy data

is periodically transmitted, the computer 10 can know that no trouble such as the stop of operation occurs in the image scanner 1. Of course, the status information (the presence or absence of any manuscript sheet or occurrence of jam) of the image scanner 1 can be transferred in place of the dummy data. Thus, the state of the image scanner 1 can be known in detail without separately providing the process for the transmission and reception of the status information.

10           In the isochronous transfer, the data transfer is performed in the format shown in Fig. 17A. This isochronous transfer format includes the data length indicating the size of the data to be transferred, the TAG, the channel number, the tCode, 15 the synchronizing bit Sy, and the transfer data (isochronous data). The computer 10 received data is required to decide if the received data is image data, status data or the other data. Thus, in this embodiment, the image scanner 1, as shown in Fig. 17B, 20 adds header information, which includes the data type and the sequence number, to the isochronous data. In this case, the data type is the code indicating image data (0x01), status data (0x02), dummy data (0xff) or the other data. The sequence number is the serial 25 number which the image scanner 1 adds to the image data read by the reader 4.

The image data having the same sequence number are successively transferred to the computer 10.

00000000-070600



Therefore, when the computer 10 cannot correctly receive the image data, it employs another image data having the same sequence number in place of the image data. Thereby, it is unnecessary to interrupt the  
5 processing or re-transmit data.

The image input apparatus according to the third embodiment will be described in detail with reference to an example of an actual image scanner. The construction of the image scanner is the same as  
10 that shown in Figs. 4-7, and will not be described in detail.

The reading processes for the case of using the ADF 13 (ADF case) and for the case of using the transparent glass 11b (FB case), in the image scanner  
15 according to the third embodiment will be described with reference to the flowcharts of Figs. 18-20. Fig. 18 is a flowchart showing the reading process for the ADF case, Fig. 19 is a flowchart showing the reading process for the process in the I/F portion 7, and Fig.  
20 20 is a flowchart showing the reading process for the FB case.

In the reading process for the ADF case, as illustrated in Fig. 18, the setting data for the reading conditions is first transferred from the  
25 computer 10 to the image scanner 1 in the asynchronous transfer mode (S2101). The CPU 2 uses this transferred setting data to initialize the image scanner 1 (S2102). At this time, the CPU 2 confirms if any manuscript

000020.2596960

sheet is present or absent on the feed hopper 14a.

Then, the CPU 2 waits for the computer 10 to issue the reading-start command (S2103). When the reading-start command is transferred from the computer 5 10 to the CPU 2 in the asynchronous transfer mode and received by the CPU 2, the light source of the reader 4 is turned on (S2104). The CPU 2 issues a command to the I/F portion 7 in order that the right to perform the isochronous transfer of image data can be acquired 10 (S2105). The CPU 2 waits for the right to perform the isochronous transfer to be acquired (S2106), and then orders the carrier 3 to carry a manuscript sheet (S2107).

The CPU 2 waits until the sheet is carried 15 from the hopper unit 14 to the manuscript sensor just before the read position 15b (S2108). The CPU 2 causes the timer to count a constant time when the fore end of the sheet is detected by the manuscript sensor, and forces the carrier to further carry the sheet until the 20 fore end of the sheet arrives at the read position 15b (S2109). Then, the reader 4 reads only one line of the image on the sheet, and supplies it through the image processor 5 to the memory 6 where it is stored (S2110). After the one line is read, the timer counts a certain 25 time (S2112), and then the reader reads the next line (S2110). The operations in steps S2110- S2112 are repeated to completely read all the images on the sheet (S2111).

00609597-070600

At this time, the I/F portion 7 performs the process shown in Fig. 19.

When the I/F portion 7 receives a command to acquire the right to perform the isochronous transfer from the CPU 2 (S2121), it sends the isochronous request to the computer 10 (S2122), and waits until a channel is assigned to acquire the right to perform the isochronous transfer (S2123). The I/F portion 7, when acquiring this right, checks if the read one-line image data is stored in the memory 6 (S2124). If no image data is stored in the memory 6, the I/F portion 7 transfers dummy data to the computer 10 in the isochronous transfer mode (S2125). If image data is stored in the memory 6, the I/F portion 7 transfers the image data in the isochronous transfer mode (S2126). The operations in steps S2124-S2126 are repeated until all the images on one sheet can be completely transferred (S2127).

Thus, in the reading process for the ADF case, the time when the sheet starts to be read is uncertain. However, the image data can be surely and periodically transferred to the computer 10 immediately after the start of reading, so that the image data can be transferred to the computer 10 without delay.

Further, in the reading process for the ADF case, it is very difficult to stop halfway the automatically fed sheet. However, the image scanner 1 according to this embodiment can transfer the image data from the small-

capacity memory of one line to the computer 10 without interrupting the transfer of sheet.

- Moreover, in the isochronous transfer mode in which the periodical data transfer can be assured but
- 5 the correction of the communication error is not performed, when error occurs at the first time one-line image data is transmitted and received, the same data is re-transmitted and used so that the following process is performed by the computer 10. In addition,
- 10 in this embodiment, since the transfer of image data to be transferred is successively repeated, the immediate correct treatment can be performed for the error occurring in this image data. The computer 10 does not need to wait until the data is re-transmitted.
- 15 Moreover, the re-transmission of image data makes it possible to compare the first transferred image data with the next transferred image data, and to decide if there is transfer error according to the compared results.
- 20 In the reading process for the FB case, as illustrated in Fig. 20, the setting data for the reading conditions is first transferred from the computer 10 to the image scanner 1 in the asynchronous mode (S2131). The CPU 2 uses this transferred setting
- 25 data to initialize the image scanner 1 (S2132).

Then, the CPU 2 waits for the computer 10 to issue the reading-start command (S2133). When receiving the reading-start command transferred from

005020.7555500

the computer 10 in the asynchronous mode, the CPU 2 causes the scanning module 15 to move to the position shown in Fig. 7B, and then forces the light source of the reader 4 to turn on (S2134). The CPU 2 orders the I/F portion 7 to acquire the right to perform the isochronous transfer of image data (S2134). The CPU 2 waits until the right to perform the isochronous transfer can be secured (S2136), and then causes the scanning module 15 to move in the sub-scanning direction (S2137).

Thereafter, the scanning module 15 reads one line of the image on the sheet, and supplies it through the image processor 5 to the memory 6 where it is stored (S2138). When the one-line image is read, the timer counts a certain time (S2140), and then the next line of the image is read (S2138). The operations in steps S2138-S2140 are repeated to completely read all images on one sheet (S2139). In the FB reading process, a positional shift is caused when the scanning module 15 is stopped halfway from being moved. However, the image scanner 1 according to this embodiment can transfer the image data using the small-capacity memory of one line to the computer 10 without interrupting the scanning module 15.

The IEEE standard 1394 interface of the image input apparatus according to this embodiment can be replaced by other interface such as USB having a transfer mode equivalent to the above-mentioned

isochronous or asynchronous transfer mode.

According to the present invention, the following technical effects can be achieved.

(1) In the image input apparatus according to the first aspect of the present invention, the image data is transferred in the first mode in which the periodic transfer can be assured. Thereby, the image data read by the reading means can be periodically transferred to the other apparatus without staying in the image input apparatus, so that the capacity of the memory for storing the image data can be made as small as possible. Moreover, the control data is transferred in the second mode in which the periodic transfer cannot be assured, to the other apparatus which does not need the periodic transfer, so that the transfer band in the first mode can be effectively used.

(2) The image input apparatus according to the second aspect of the present invention can transmit the information about the image input apparatus to the other apparatus effectively utilizing the period in which the image data is not transferred.

(3) The image input apparatus according to the third aspect of the present invention can transmit the state of the image input until the image data transfer is started, to the other apparatus effectively utilizing the period in which the image data is not transferred. In addition, the image data is periodically transferred immediately after reading the

09609697.070600

manuscript sheet, so that no delay is occurs at the start of the image data transfer. As a result, the data transfer can be performed using the smallest-capacity memory.

- 5 (4) In the image input apparatus according to the fourth or fifth aspect of the present invention, the right to use the bus can be acquired until the image data on the next manuscript sheet starts to be processed. Thereby, the image data of a plurality of  
10 sheets can be periodically transferred with no interruption at each of successively fed sheets. As a result, it is possible to increase the image input processing speed. Also, the image data does not stay in the image input apparatus, so that the capacity of  
15 the memory for storing the image data can be made as small as possible.

- (5) In the image input apparatus according to the sixth aspect of the present invention, the other apparatus receives the status data indicating the  
20 presence or absence of a sheet. Thereby, the other apparatus can know that the image data on the next sheet is to be successively transferred, so that the successive image data can be effectively processed.

- (6) In the image input apparatus according to the  
25 seventh aspect of the present invention, the image data read by the reading means is periodically transferred to the other apparatus, and the same image data as this transferred image data is re-transmitted thereto.

09609697, 070600

periodically transferred to the other apparatus irrespective of whether or not error occurs when the image data is transmitted and received. Thereby, the image data does not stay in the image input apparatus, so that the capacity of the memory for storing the

10 image data can be made as small as possible.

(7) In the image input apparatus according to the eighth aspect of the present invention, the image data read by the reading means is periodically transferred to other apparatus, and the same data as this

15 transferred image data is successively re-transmitted  
thereto. Thereby, this re-transmitted image data can  
be immediately used for the case in which error occurs  
when the image data is transmitted and received. That  
is, even at the other apparatus to which the image data  
20 is transferred, the time necessary for the image data  
to be processed can be decreased.

(8) In the image input apparatus according to the ninth aspect of the present invention, the image data can be periodically transferred every predetermined unit, so that the memory capacity can be set to that which corresponds to this predetermined unit.



WHAT IS CLAIMED IS:

1. An image input apparatus comprising:  
reading means for reading a manuscript image;  
and

communication means for performing a transfer of image data, which is read by the reading means, to another apparatus and a transfer of control data to the other apparatus, wherein

the communication means has a first mode in which a periodic data transfer can be assured, and a second mode in which the period data transfer cannot be assured, and transfers the image data and the control data in the first and second modes, respectively.

2. An image input apparatus comprising:  
reading means for reading a manuscript image;  
and

communication means for performing a transfer of image data read by the reading means to another apparatus, wherein

the communication means has a mode in which a periodic data transfer can be assured, and transfers the image data in the mode and transfers data other than the image data in a period in which there is no image data to be transferred.

3. An image input apparatus comprising:  
reading means for reading a manuscript image;  
and

communication means for transferring image

00509597.070600

data read by the reading means to another apparatus,  
wherein

the communication means has a mode in which a  
periodic data transfer can be assured, and

when the image data is transferred in the  
mode, the communication means transfers data other than  
the image data until the transfer of the image data is  
started.

4. An image input apparatus comprising:  
supply means for successively feeding a  
plurality of manuscript sheets;  
reading means for sequentially reading the  
plurality of manuscript sheets fed by the supply means;  
and

communication means for transferring image  
data of each of the plurality of manuscript sheets,  
which is read by the reading means, to another  
apparatus, wherein

the communication means has a transfer mode  
in which a periodic data transfer can be assured, and  
transfers status data in the transfer mode after  
transferring one-sheet image data in the transfer mode,  
the status data indicating a state of the image input  
apparatus.

5. An image input apparatus comprising:  
supply means for successively feeding a  
plurality of manuscript sheets;  
reading means for sequentially reading the

00609697.070600

plurality of manuscript sheets fed by the supply means;  
and

communication means for transferring image  
data of each of the plurality of manuscript sheets,  
which is read by the reading means, to another  
apparatus, wherein

the communication means has a transfer mode  
in which a periodic data transfer can be assured,  
transfers the image data of the plurality of manuscript  
sheets in the transfer mode, and transfers status data  
in the transfer mode in intervals between the image  
data of the plurality of manuscript sheets to be  
transferred, the status data indicating a state of the  
image input apparatus.

6. An image input apparatus according to claim  
4, wherein the status data indicates whether or not  
there is any manuscript sheet in the supply means.

7. An image input apparatus according to claim  
5, wherein the status data indicates whether or not  
there is any manuscript sheet in the supply means.

8. An image input apparatus comprising:  
reading means for reading a manuscript image;  
and

communication means for transferring image  
data, which is read by the reading means, to another  
apparatus, wherein

the communication means has a transfer mode  
in which a periodic data transfer can be assured,

09509597.070500

transfers the image data in the transfer mode, and transfers the same image data as the transferred image data in a free period of the transfer mode.

9. An image input apparatus comprising:  
reading means for reading a manuscript sheet;  
and

communication means for transferring image data, which is read by the reading means, to another apparatus, wherein

the communication means has a transfer mode in which a periodic data transfer can be assured, transfers the image data in the transfer mode, and successively transfers the same image data as the transferred image data in the transfer mode.

10. An image input apparatus according to claim 8, wherein the image data to be transferred is divided into predetermined units.

11. An image input apparatus according to claim 9, wherein the image data to be transferred is divided into predetermined units.


09609697:070600

ABSTRACT OF THE DISCLOSURE


An image input apparatus includes a reading unit for reading a manuscript image, and a communication unit for transferring the image data, which is read by the reading unit, and control data to another apparatus. The communication unit has a first mode in which a periodic data transfer can be assured, and a second mode in which the periodic data transfer cannot be assured. The communication unit transfers the image data in the first mode, and the control data in the second mode.

09609697.070600


**FIG. 1**

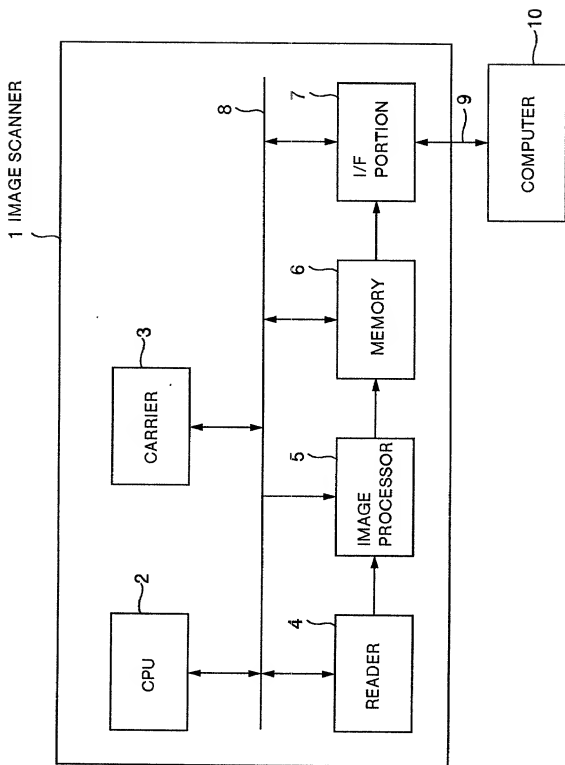

# FIG.2A

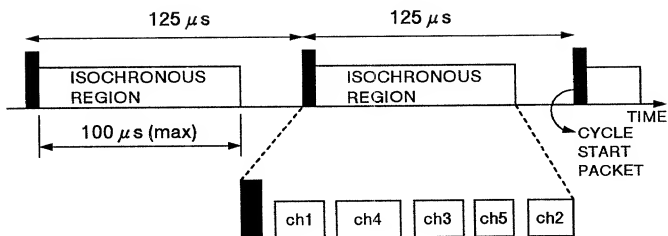

# FIG.2B

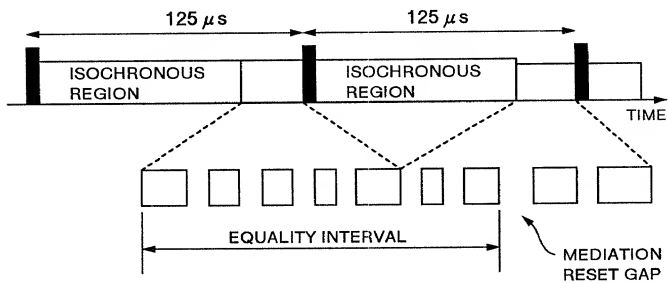

009020-26960960





FIG.4


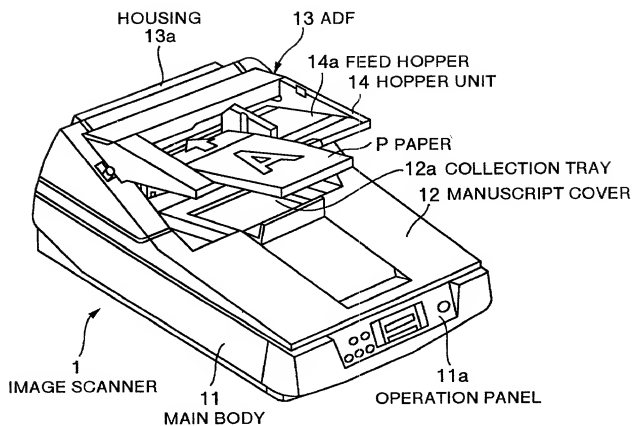


FIG.5

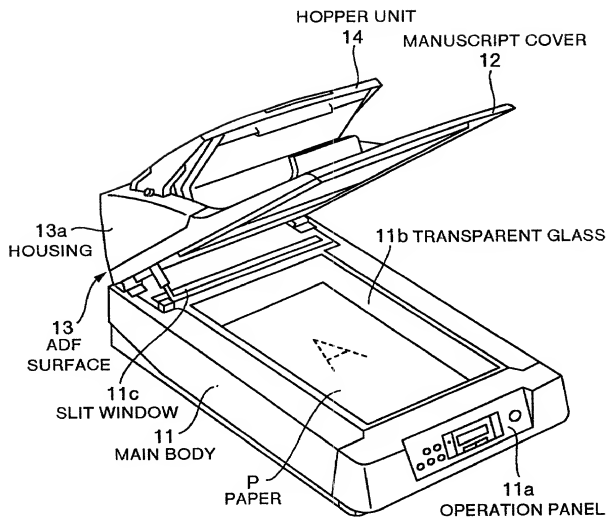

009020\*26960960

FIG.6

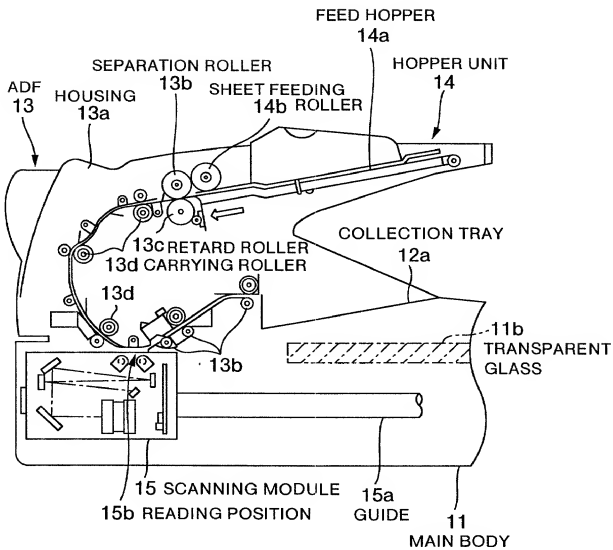


FIG.7A

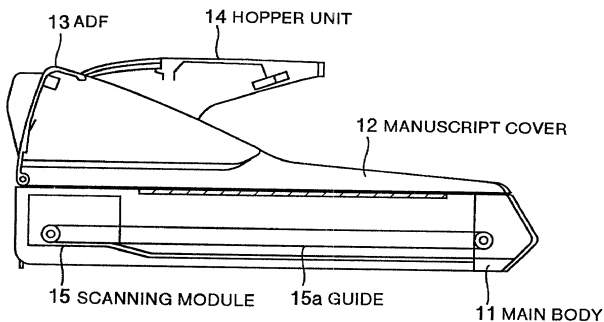


FIG.7B


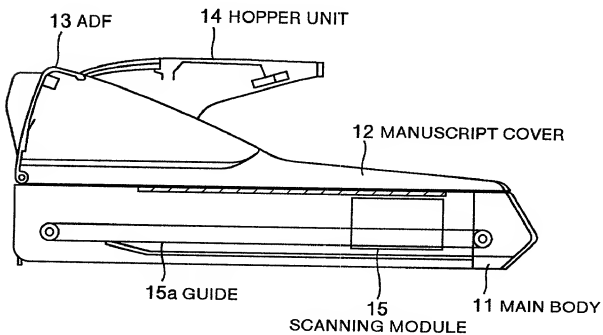


FIG.8

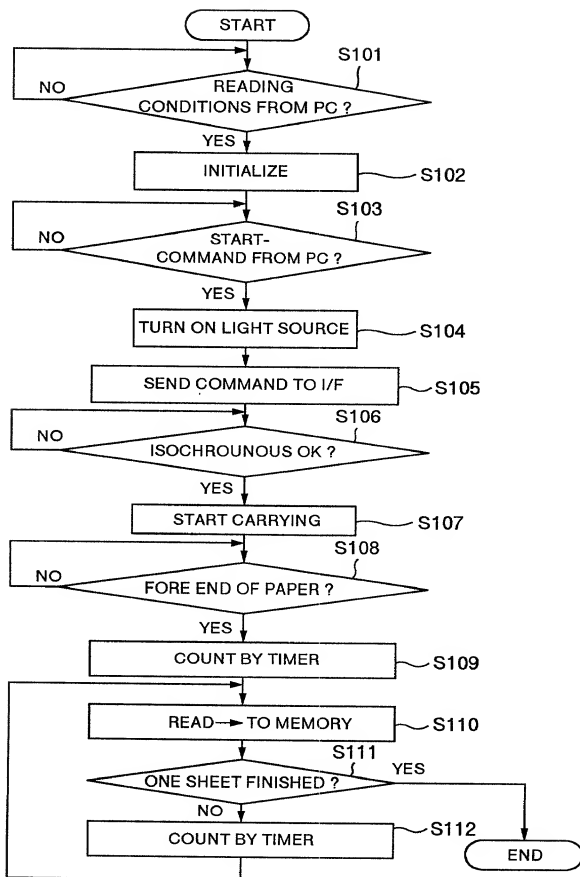

009070 26960960

FIG.9



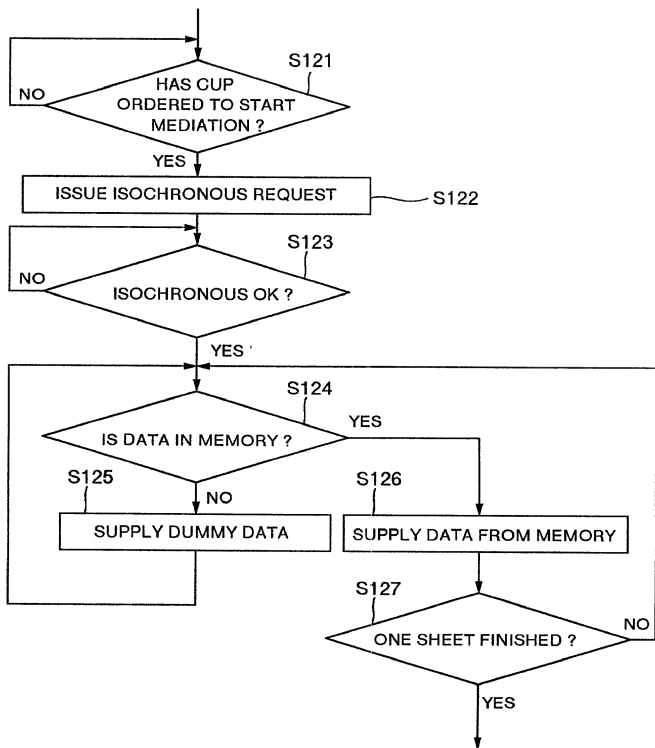


FIG.10

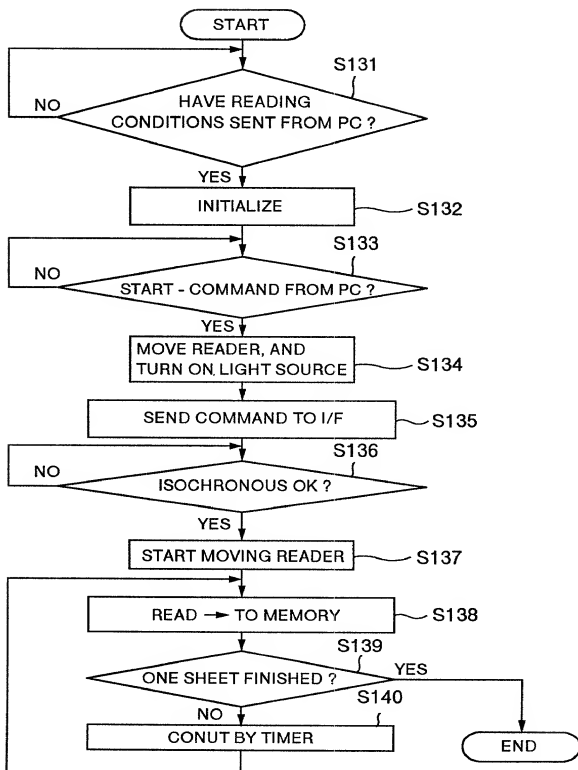

# FIG.11

## PRIOR ART

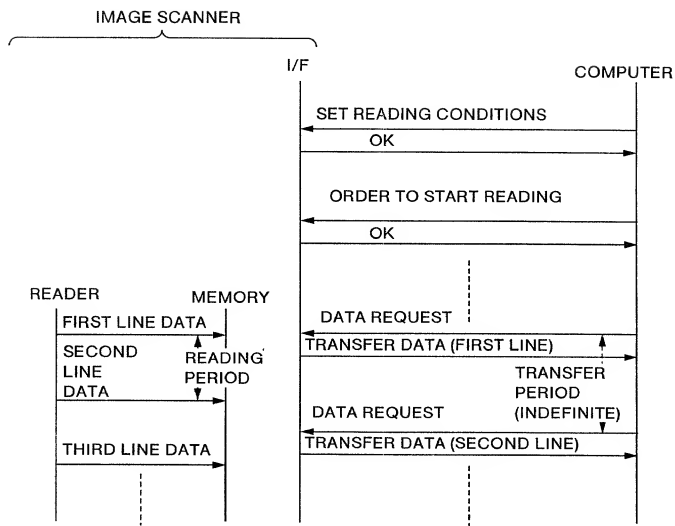



# FIG.12

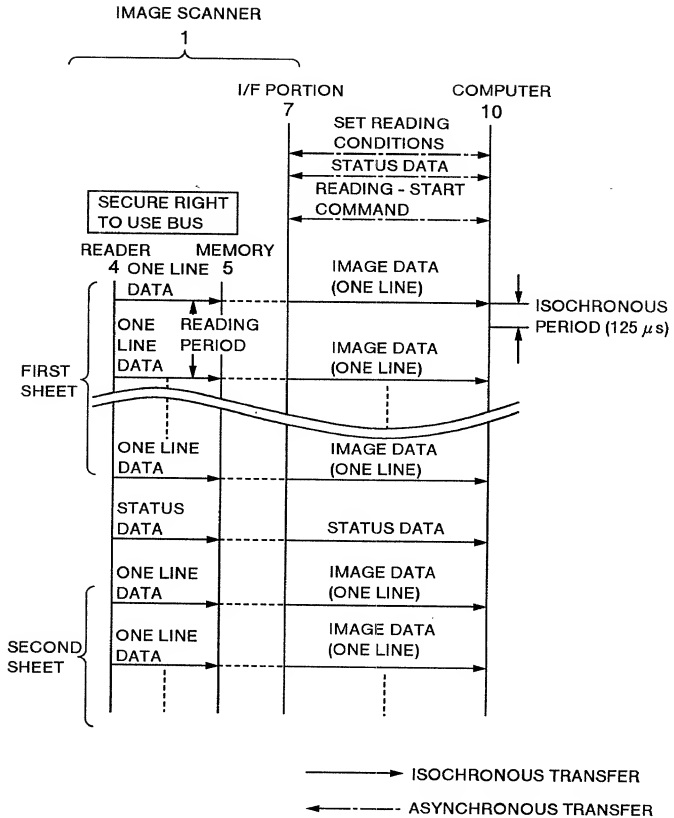


FIG. 13


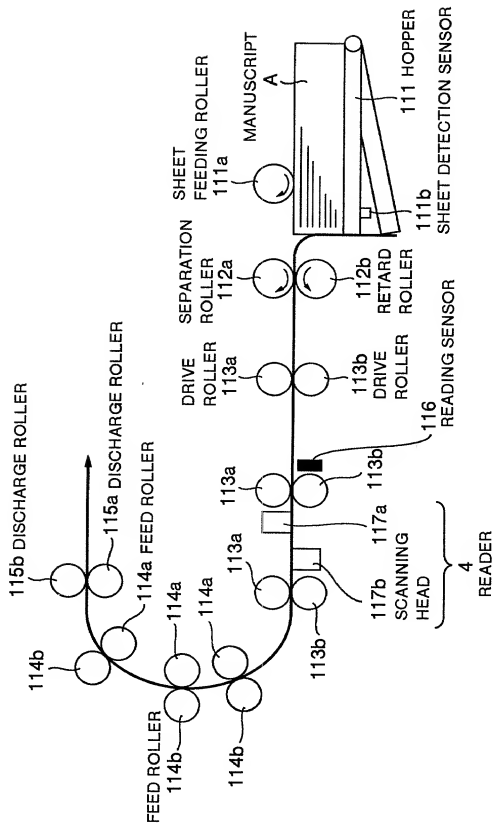


FIG.14

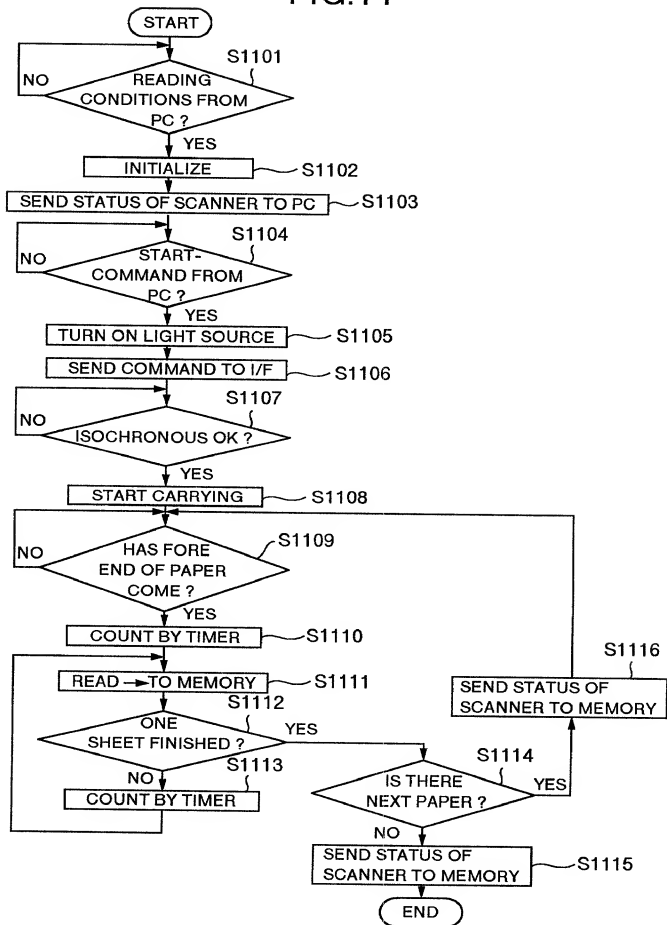

009020/695962

FIG.15


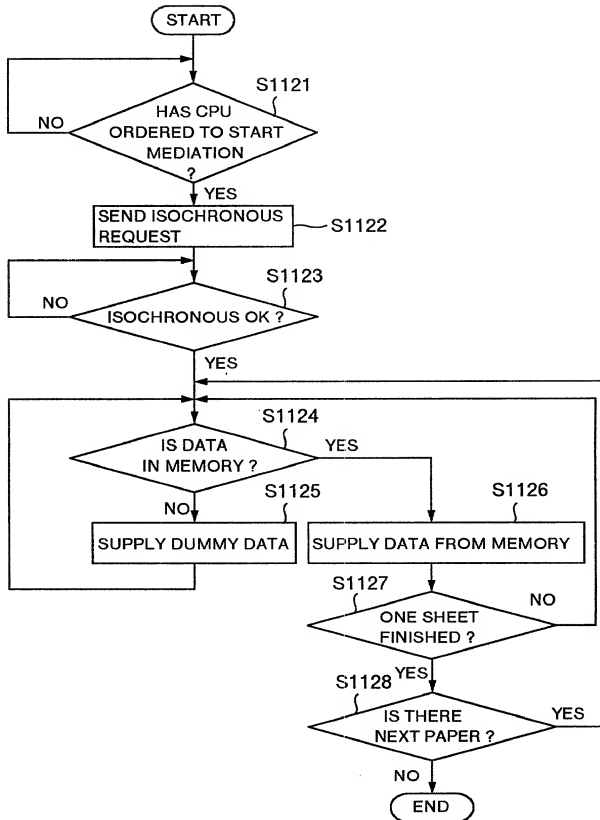


FIG.16

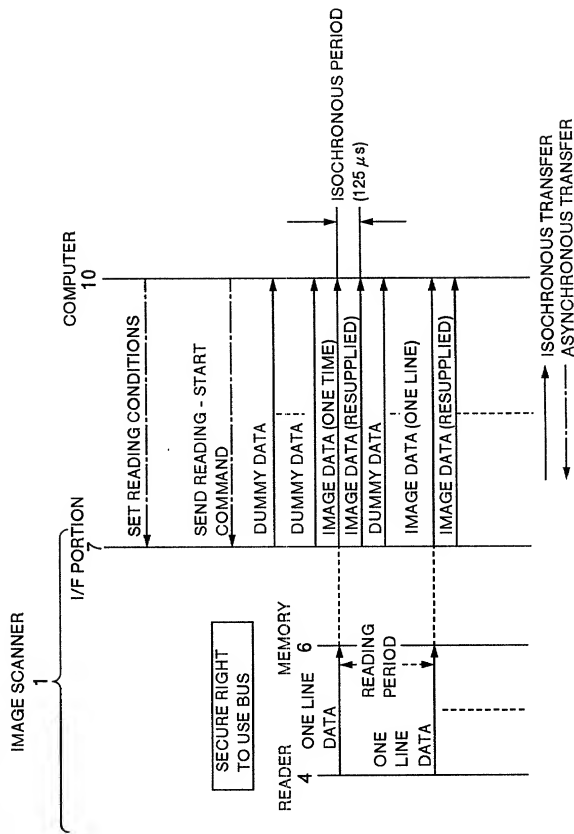

# FIG.17A


| DATA<br>LENGTH  | TAG | CHANNEL<br>NUMBER | tCode | Sy |
|-----------------|-----|-------------------|-------|----|
| ISOCRONOUS DATA |     |                   |       |    |

# FIG.17B

| DATA TYPE                      |
|--------------------------------|
| SEQUENCE NUMBER                |
| DATA<br>(IMAGE DATA AND SO ON) |


009020\*26960960

FIG.18

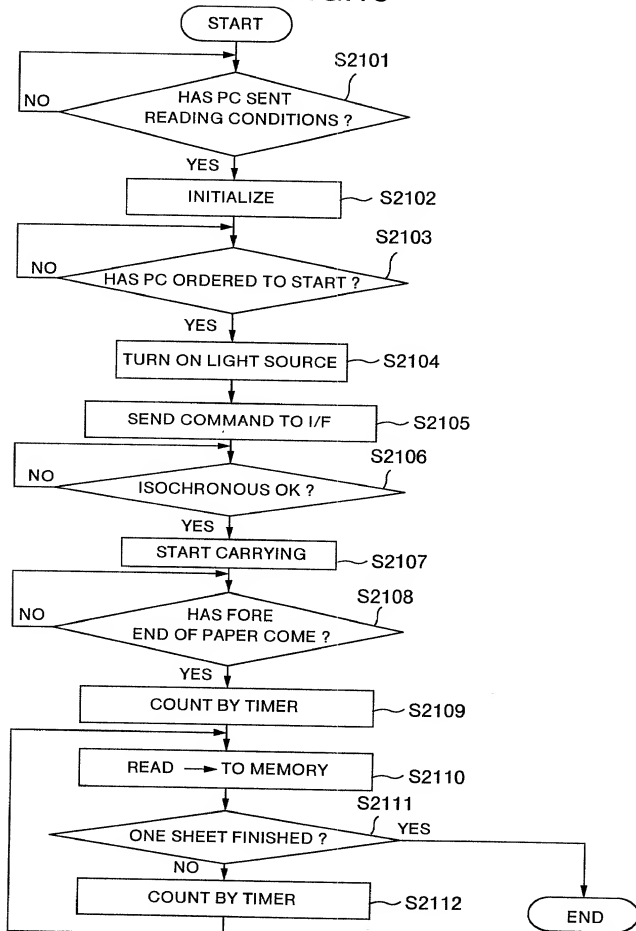

009607.2696960


FIG.19

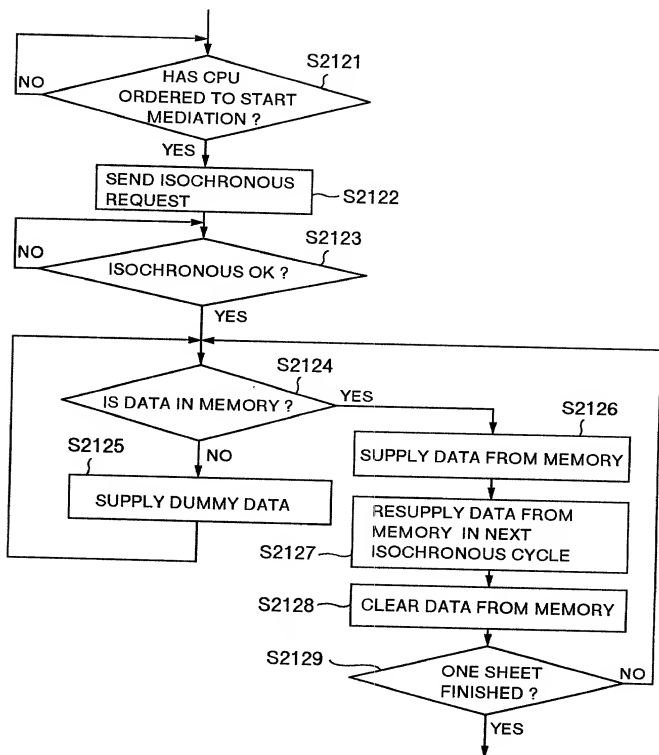

009020-2996960



FIG.20

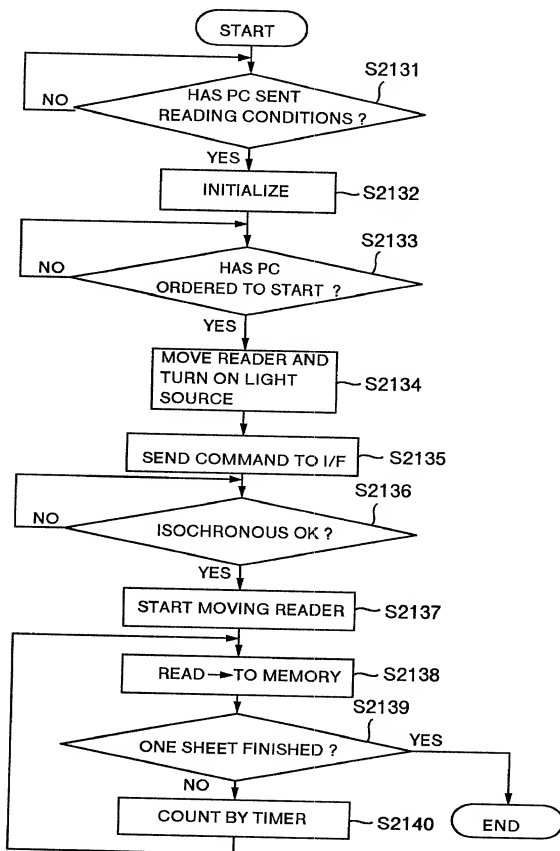

009020-269698

E5262-01(\*)

# APPLICATION FOR UNITED STATES PATENT

## Declaration for Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the

invention entitled: 1 "IMAGE INPUT APPARATUS"  
 the specification of which 2 (file no. \_\_\_\_\_)  
 (check at least one) 3 [X] is attached hereto  
 4 [ ] was filed on \_\_\_\_\_ as (5) U.S. Application Serial No. \_\_\_\_\_  
 6 [ ] and was amended on \_\_\_\_\_ (if applicable)

|   |       |  |
|---|-------|--|
| Use this portion only if you are entering the U.S. National phase based on a PCT International Application designating the U.S. | 7 [ ] | was filed as PCT international application                               |
|   | 8     | Number _____   |
|   | 9     | on _____   |
|   | 10    | and was amended under PCT Article(s) 19 and/or 34 _____ (if applicable). |

I hereby declare that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended, by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me which is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 or 365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date earlier than that of the application(s) on which priority is claimed.

Prior (Foreign) Application(s) any Priority Claims Under 35 U.S.C. 119 or 365 \_\_\_\_\_ Priority Claimed

|              |                  |                          |         |
|--------------|------------------|--------------------------|---------|
| <u>Japan</u> | <u>11-194019</u> | <u>8 July, 1999</u>      | [X] [ ] |
| (Country)    | (Number)         | (Day/Month/Year Filed)   | Yes No  |
| <u>Japan</u> | <u>11-250009</u> | <u>3 September, 1999</u> | [X] [ ] |
| (Country)    | (Number)         | (Day/Month/Year Filed)   | Yes No  |
| <u>Japan</u> | <u>11-250013</u> | <u>3 September, 1999</u> | [X] [ ] |
| (Country)    | (Number)         | (Day/Month/Year Filed)   | Yes No  |

[ ] Additional foreign application numbers are listed on a supplemental priority data sheet attached hereto.

Priority Claim(s) from U.S. Provisional Application(s) - I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

|                       |                            |                       |                            |
|-----------------------|----------------------------|-----------------------|----------------------------|
| Application No. _____ | Day/Month/Year Filed _____ | Application No. _____ | Day/Month/Year Filed _____ |
|-----------------------|----------------------------|-----------------------|----------------------------|

[ ] Additional provisional application numbers are listed on a supplemental priority data sheet attached hereto.

|   |  |   |
|---|--|---|
| Do not use this portion to identify a PCT application if the parent application is the U.S. National phase of the PCT application | I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) or under Title 35, United States Code, 365 of any PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between filing date of the prior application and the national or PCT international filing date of this application. |   |
|   | 12   | _____ (U.S. Parent Application or PCT Parent Number) _____ (Parent Filing Date) Status (patented, pending, abandoned) |
|   | [ ] Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet attached hereto.   |   |

I hereby appoint the following attorneys of the firm of Stevens, Davis, Miller & Mosher, L.L.P. as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office: James E. Ledbetter, Reg. No. 28732; Thomas P. Pavelko, Reg. No. 31689; and Anthony P. Venturino, Reg. No. 31674.

ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO STEVENS, DAVIS, MILLER & MOSHER, L.L.P., 1615 L Street, N.W., Suite 850, Washington, D.C. 20036, TELEPHONE (202) 408-5100, FACSIMILE (202) 408-5200.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful statements may jeopardize the validity of the application or any patent issuing thereon.

13a Typewritten Full Name of Sole or First Inventor Susumu MATSUZOE  
Given Name X000000000 Family Name

14a Inventor's Signature A Susumu Matsuzoe

15a Date of Signature A June 23, 2000  
Month Day Year

16a Residence Onojo-shi, Japan  
City State or Province Country

17a Citizenship Japan

18a Post Office Address (Insert complete mailing address, including country) 6-20, Wakakusa-4-chome, Onojo-shi, Japan.

13b Typewritten Full Name of Second Inventor Takeshi NAKAYAMA  
Given Name X000000000 Family Name

14b Inventor's Signature A Takeshi Nakayama

15b Date of Signature A June 23, 2000  
Month Day Year

16b Residence Fukuoka, Japan  
City State or Province Country

17b Citizenship Japan

18b Post Office Address (Insert complete mailing address, including country) 30-20-1-901, Ijiri, Minami-ku, Fukuoka-shi, Japan.

13c Typewritten Full Name of Third Inventor \_\_\_\_\_  
Given Name Middle Name Family Name

14c Inventor's Signature A \_\_\_\_\_

15c Date of Signature A \_\_\_\_\_  
Month Day Year

16c Residence \_\_\_\_\_  
City State or Province Country

17c Citizenship \_\_\_\_\_

18c Post Office Address (Insert complete mailing address, including country) \_\_\_\_\_

\*Note to Inventor: Please sign name on line 14 exactly as it appears in line 13 and insert the actual date of signing on line 15. If there are more than four inventors, please add a copy of this page for identification and signatures for the additional inventors.

00907076960960